



NATURAL ENVIRONMENTS, Inc.

2121 Watt Street  
Little Rock Arkansas 72227  
501-225-0700  
[info@stellarsun.com](mailto:info@stellarsun.com)

## SS-80/40 DHW \*


DATE 09/10

- 1ea. SSU-80-SE— 80 gallon **Stainless Steel** storage tank
- 1ea. AET-40 **Collector** (4' x 10')
- 1ea. AET-MH-Standard Mount Set
- 1ea. Laing 12v circulating **Pump**
- 1ea. KC20 **PV** module
- Misc. Expansion tank, tempering valve, pressure gage, fittings and valves are pre-assembled unto storage tank. Collector, mounting hardware and copper flashings included and packaged separately.

Installation, copper pipe to and from collector, pipe insulation and low voltage wire from PV to pump provided by installer.



Sub –Total Freight FOB Stellar Sun, LR	4,805.00
Sales Tax (typical)	360.00
Local Installation (typical residential)	\$1,200.00 to \$1,500.00

\*Pricing subject to change

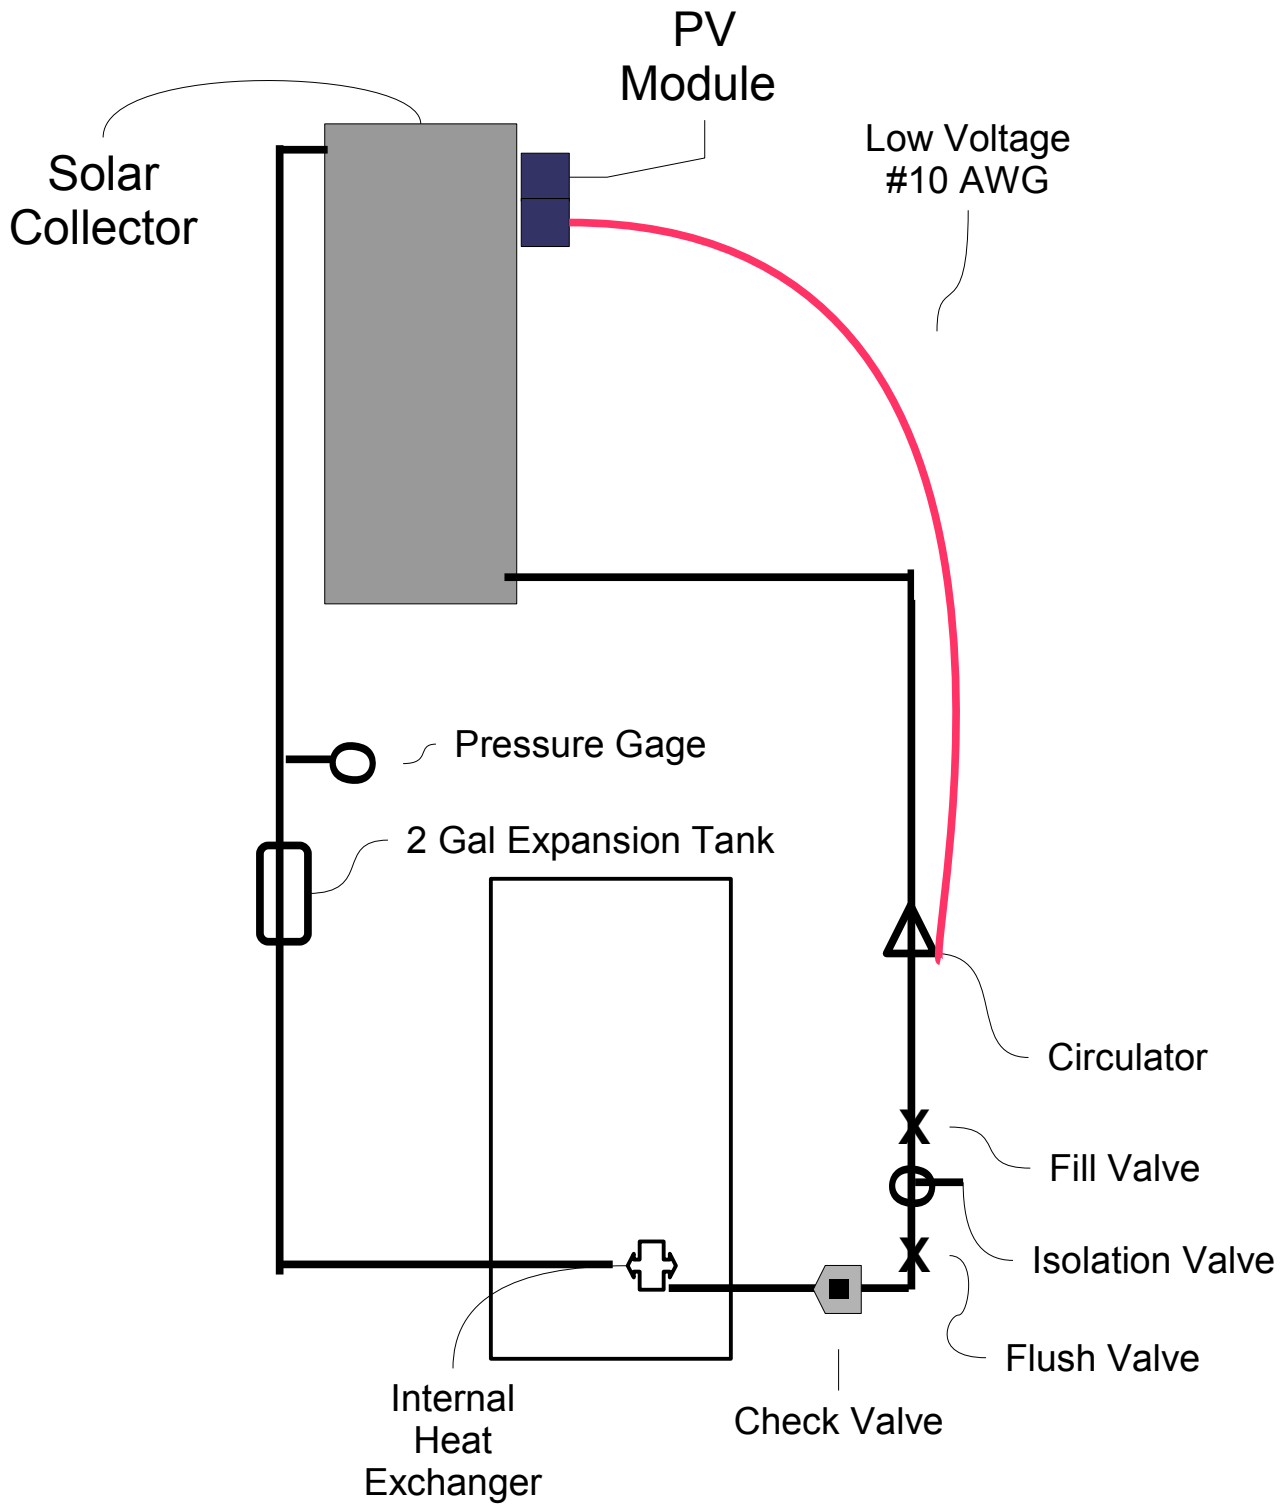

<b>GENERIC</b>		<b>S-1</b>
SOLAR WATER HEATING		
NOT TO SCALE		
Stellar Sun 04/10		

# All Components Pre-Assembled and Pressure Tested

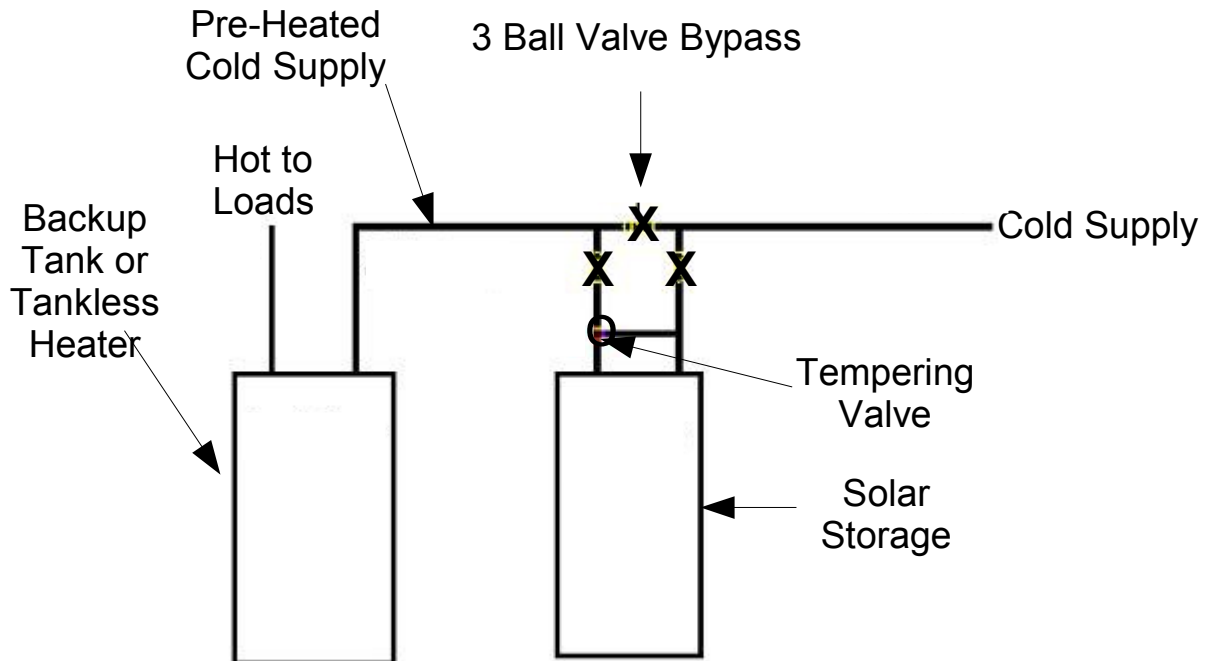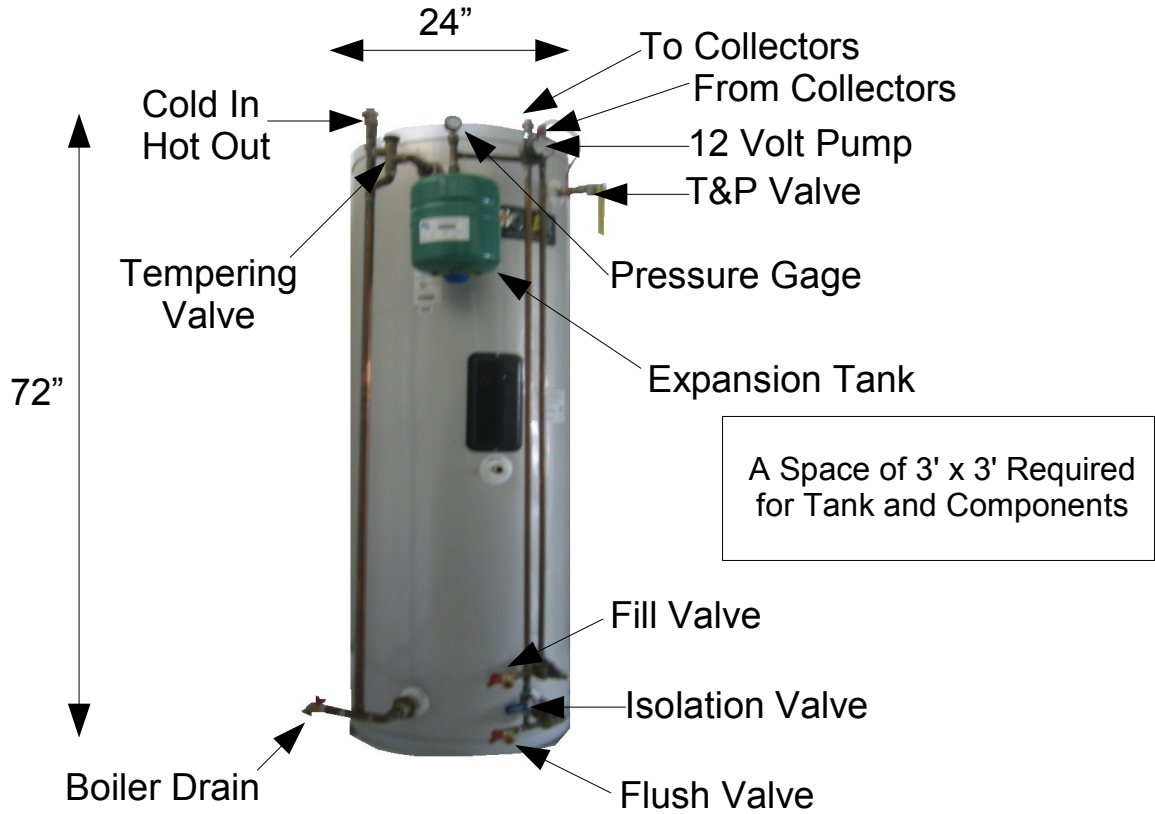

<b>GENERIC</b>	<b>S-2</b>
SOLAR WATER HEATING	
NOT TO SCALE	
Stellar Sun 04/10	